


# YVHW Series

## WaveRing® Imperial Internal

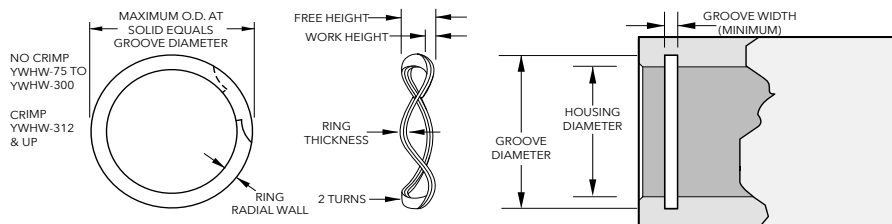

**Product Dimensions:** All dimensions in inches unless otherwise specified.

TFC Part Number		Housing Diameter		Ring		Groove		Load (lb) @ Work Height	Max Free Height (in)	Number of Waves
Carbon Steel	Add Suffix	in	mm	Thickness (in)	Radial Wall (in)	Diameter (in)	Width Minimum (in)			
	17-7									
YVHW-75	-S17	0,750	19,05	0,035	0,065	0,796	0,119	25 @ 0,080	0,114	3
YVHW-87	-S17	0,875	22,23	0,042	0,085	0,931	0,115	30 @ 0,085	0,110	3
YVHW-100	-S17	1,000	25,40	0,042	0,085	1,066	0,125	34 @ 0,085	0,120	3
YVHW-112	-S17	1,125	28,58	0,050	0,128	1,197	0,130	38 @ 0,100	0,125	3
YVHW-125	-S17	1,250	31,75	0,050	0,128	1,330	0,140	40 @ 0,100	0,135	3
YVHW-137	-S17	1,375	34,93	0,050	0,128	1,461	0,130	45 @ 0,100	0,125	4
YVHW-150	-S17	1,500	38,10	0,050	0,128	1,594	0,140	50 @ 0,100	0,135	4
YVHW-162	-S17	1,625	41,28	0,062	0,158	1,725	0,140	55 @ 0,110	0,135	4
YVHW-175	-S17	1,750	44,45	0,062	0,158	1,858	0,145	60 @ 0,110	0,140	4
YVHW-187	-S17	1,875	47,63	0,062	0,158	1,989	0,146	63 @ 0,110	0,141	4
YVHW-200	-S17	2,000	50,80	0,062	0,158	2,122	0,155	65 @ 0,110	0,150	4
YVHW-212	-S17	2,125	53,98	0,078	0,188	2,251	0,175	70 @ 0,130	0,170	4
YVHW-225	-S17	2,250	57,15	0,078	0,188	2,382	0,180	75 @ 0,130	0,175	4
YVHW-237	-S17	2,375	60,33	0,078	0,188	2,517	0,185	80 @ 0,130	0,180	4
YVHW-250	-S17	2,500	63,50	0,078	0,188	2,648	0,188	84 @ 0,130	0,183	4
YVHW-262	-S17	2,625	66,68	0,093	0,225	2,781	0,225	88 @ 0,170	0,220	4
YVHW-275	-S17	2,750	69,85	0,093	0,225	2,914	0,234	94 @ 0,170	0,229	4
YVHW-287	-S17	2,875	73,03	0,093	0,225	3,051	0,230	97 @ 0,170	0,225	4
YVHW-300	-S17	3,000	76,20	0,093	0,225	3,182	0,235	100 @ 0,170	0,230	4
YVHW-312	-S17	3,125	79,38	0,111	0,281	3,315	0,255	103 @ 0,185	0,250	4
YVHW-325	-S17	3,250	82,55	0,111	0,281	3,446	0,255	106 @ 0,185	0,250	4
YVHW-350	-S17	3,500	88,90	0,111	0,281	3,710	0,250	115 @ 0,185	0,245	4
YVHW-362	-S17	3,625	92,08	0,111	0,281	3,841	0,250	117 @ 0,185	0,250	4
YVHW-375	-S17	3,750	95,25	0,111	0,312	3,974	0,260	121 @ 0,185	0,255	4
YVHW-387	-S17	3,875	98,43	0,111	0,312	4,107	0,265	126 @ 0,185	0,260	4
YVHW-400	-S17	4,000	101,60	0,111	0,312	4,240	0,260	130 @ 0,185	0,255	4
YVHW-412	-S17	4,125	104,78	0,111	0,312	4,365	0,263	134 @ 0,185	0,258	4
YVHW-425	-S17	4,250	107,95	0,111	0,312	4,490	0,269	140 @ 0,185	0,264	4
YVHW-450	-S17	4,500	114,30	0,111	0,312	4,740	0,255	150 @ 0,185	0,250	5
YVHW-475	-S17	4,750	120,65	0,111	0,312	4,995	0,257	160 @ 0,185	0,252	5
YVHW-500	-S17	5,000	127,00	0,111	0,312	5,260	0,252	170 @ 0,185	0,247	5