


Schnapping (Amerikanisch)

XXDH Serie

Lagervorrätig in:

- Federstahl
- 302 Edelstahl

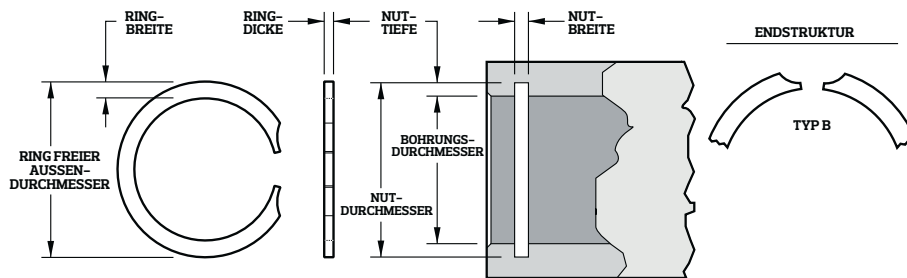

Teile-Nr. ¹	Für Bohrungs-Ø		Ring				Nut		Lastaufnahme	
	[mm]	[inch]	Freier Außen-Ø [mm]	Ringbreite [mm]	Ringstärke [mm]	Nutgrund-Ø [mm]	Nutbreite [mm]	Nutverformung [N] ²	Ringquerkraft [N] ³	
XXDH-112	28,58	1,125	30,38	2,36	1,07	30,00	1,17	9910	25165	
XXDH-125	31,75	1,250	33,78	2,36	1,07	33,27	1,17	11797	27959	
XXDH-137	34,93	1,375	37,08	2,36	1,07	36,45	1,17	12976	30758	
XXDH-150	38,10	1,500	40,64	3,18	1,07	40,13	1,17	18872	33553	
XXDH-162	41,28	1,625	43,82	3,18	1,07	43,31	1,17	20448	36348	
XXDH-175	44,45	1,750	47,12	3,18	1,07	46,48	1,17	22019	39142	
XXDH-187	47,63	1,875	50,55	3,96	1,07	49,91	1,17	26540	41941	
XXDH-200	50,80	2,000	53,72	3,96	1,07	53,09	1,17	28311	44736	
XXDH-206	52,37	2,062	55,30	3,96	1,07	54,66	1,17	29188	46124	
XXDH-218	55,55	2,187	58,47	3,96	1,07	57,84	1,17	30959	48919	
XXDH-231	58,72	2,312	61,77	3,96	1,07	61,01	1,17	32725	51713	
XXDH-243	61,90	2,437	64,95	3,96	1,07	64,19	1,17	34496	54513	
XXDH-256	65,07	2,562	68,12	3,96	1,07	67,36	1,17	36263	57307	
XXDH-300	76,20	3,000	80,11	4,75	1,57	79,35	1,73	58509	94029	
XXDH-325	82,55	3,250	86,46	4,75	1,57	85,70	1,73	63381	101865	
XXDH-350	88,90	3,500	92,81	4,75	1,57	92,05	1,73	68259	109701	
XXDH-375	95,25	3,750	99,16	4,75	1,57	98,40	1,73	73131	117538	
XXDH-400	101,60	4,000	105,54	4,75	1,57	104,78	1,73	78636	125374	
XXDH-425	107,95	4,250	112,50	5,54	1,98	111,61	2,18	96254	160423	
XXDH-450	114,30	4,500	118,85	5,54	1,98	117,96	2,18	101914	169857	
XXDH-475	120,65	4,750	125,20	5,54	1,98	124,31	2,18	107579	179295	
XXDH-500	127,00	5,000	131,67	5,54	1,98	130,66	2,18	113239	188733	
XXDH-525	133,35	5,250	138,02	5,54	1,98	137,01	2,18	118900	198167	
XXDH-575	146,05	5,750	150,72	5,54	1,98	149,71	2,18	130225	217040	
XXDH-600	152,40	6,000	157,99	6,35	2,36	156,46	2,62	150984	271775	
XXDH-650	165,10	6,500	170,94	6,35	2,36	169,16	2,62	163569	294421	
XXDH-700	177,80	7,000	183,90	6,35	2,36	181,86	2,62	176149	317067	
XXDH-725	184,15	7,250	190,50	6,35	2,36	188,21	2,62	182441	328392	
XXDH-750	190,50	7,500	197,10	6,35	2,36	194,56	2,62	188733	339717	
XXDH-800	203,20	8,000	210,44	6,35	2,36	207,26	2,62	201314	362364	

¹ Fügen Sie Suffix "-S02" oder "-S16" für Edelstahl hinzu. ² Streckgrenze des Nutmaterials = 310 N/mm², Sicherheitsfaktor 2. ³ Basierend auf Federstahl, Sicherheitsfaktor 3.